
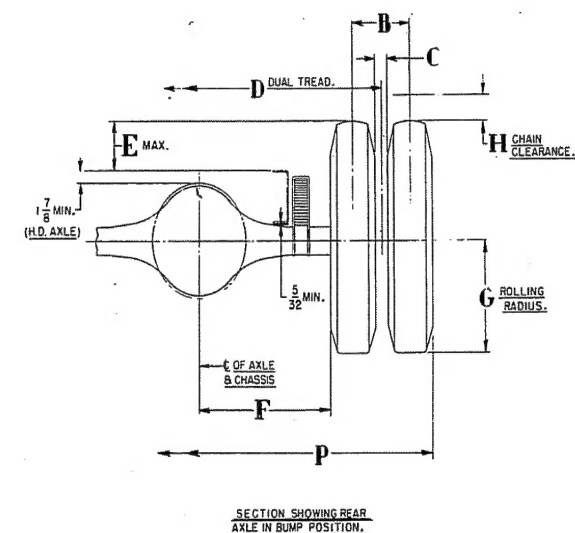


TIRE SIZE	RIM SIZE	A	B	C	D	E	F	G	H	I
7.50/20 8P	20X6	64 $\frac{1}{4}$								
7.50/20 10P	20X6	64 $\frac{1}{4}$								
8.25/20 10P	20X6	64 $\frac{1}{4}$								
8.25/20 12P	20X6	64 $\frac{1}{4}$								
9.00/20 10P	20X6.5	63 $\frac{1}{4}$								
7.50/20 8PD	20X6	10 $\frac{7}{8}$	2.48	63 $\frac{3}{4}$	7.64	25.25	17.42	4	89	
8.25/20 10PD	20X6	10 $\frac{7}{8}$	1.94	63 $\frac{3}{4}$	8.29	24.98	18.07	4	89	
8.25/20 12PD	20X6	10 $\frac{1}{2}$	1.94	63 $\frac{3}{4}$	8.29	24.98	18.07	4	89	
9.00/20 10PD	20X6.5	11 $\frac{1}{8}$	1.42	65 $\frac{3}{4}$	9.25	24.21	19.00	4	910	

NOTE: FOR JOBS WITH 5500^{mm} & 6000^{mm} FRONT AXLES
ADD 6 5/8" TO DIM "A"

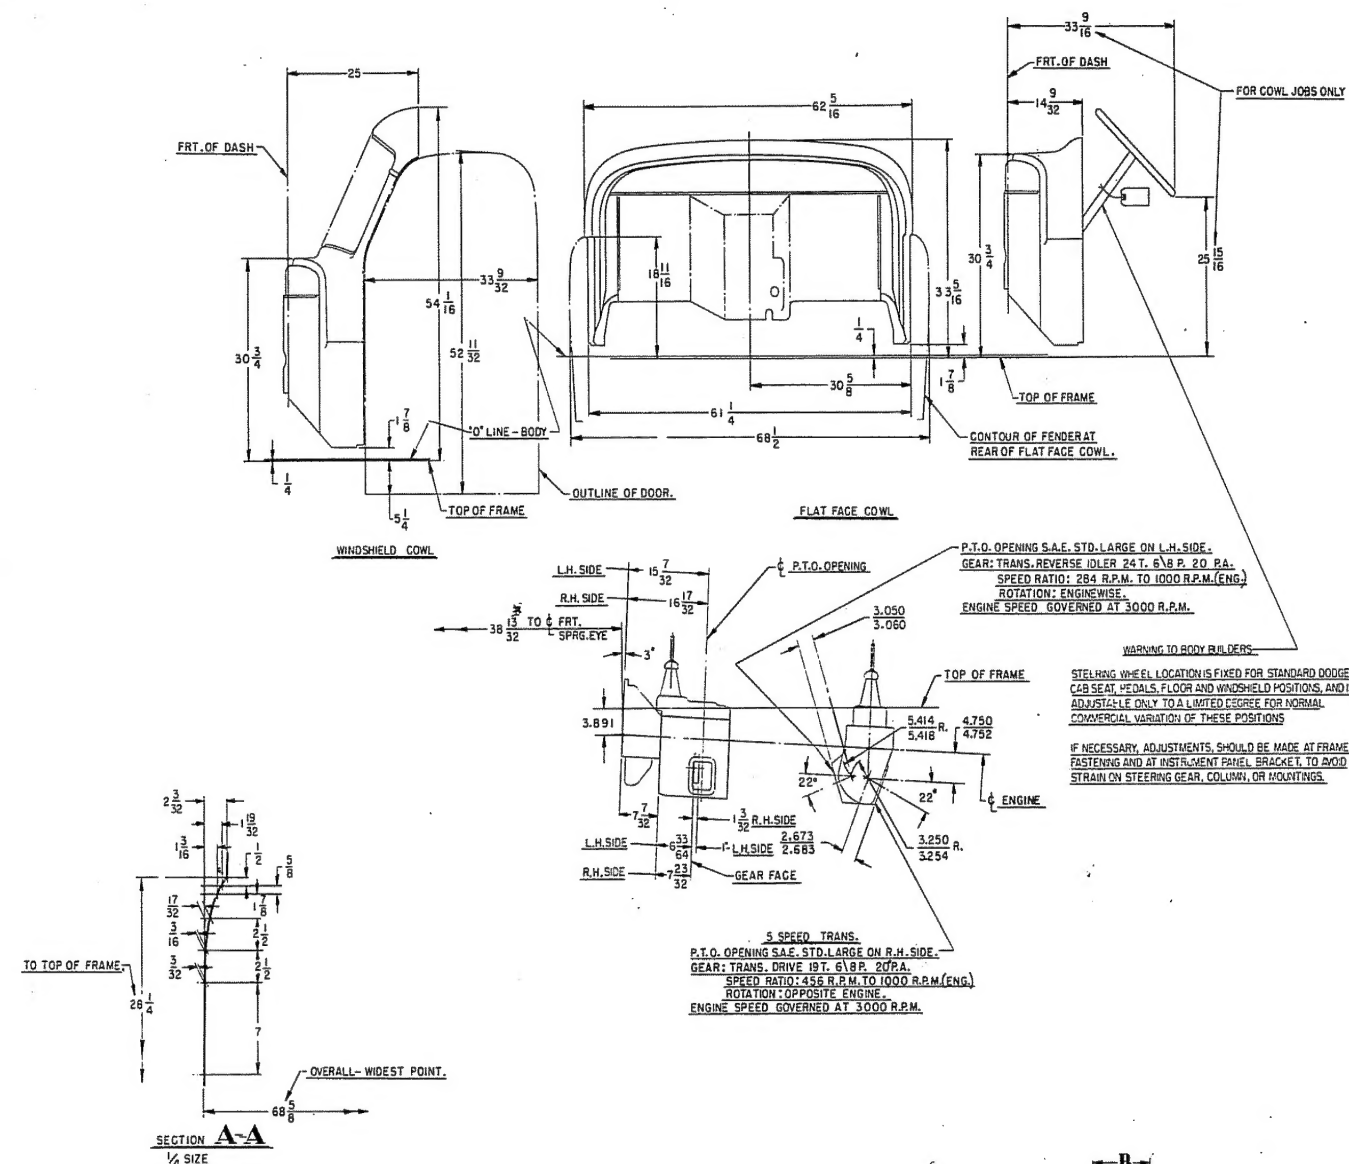

BODY BUILDERS LAYOUT

R, RA—130", 142" W.B. (TRACTOR)